


● Pro vnější soustružení

MGEUR/L Šířka: 3,0–8,0 T-MAX: 3,0–5,0	TBH Šířka: 1,25–4,5 T-MAX: 1,5–5,0	PH Šířka: 3,0–5,0 Ø D-MAX: 30–50	GH Šířka: 1,23–4,28 T-MAX: 1,5–4,0	GFT Šířka: 1,1–8,0 T-MAX: 2,1–9,0	DBH Šířka: 3,0–8,0 T-MAX: 14	MGEHR/L Šířka: 1,5–8,0 T-MAX: 10–28
MRMN	TB	POB	GO, GS	GW, BF	DC, DB	MGMN, MRMN, MRGN, MGGN

● Pro vnitřní soustružení

NFTIH Šířka: 0,75–4,02 T-MAX: 1,3–4,6	GFIK Šířka: 2,0–8,0 T-MAX: 2,0–8,0	GFIP Šířka: 1,1–8,0 T-MAX: 2,1–9,0	IGH Šířka: 1,25–2,8 T-MAX: 1,5–2,3	MGIVR/L Šířka: 1,5–8,0 T-MAX: 4,0–10	MGIUR/L Šířka: 3,0–8,0 T-MAX: 3,5–6,5
NFTG, NFTF, NFTT	GR	GW, BF	IG	MGMN, MGGN, MRMN, MRGN	MRMN

● Pro čelní zápichy

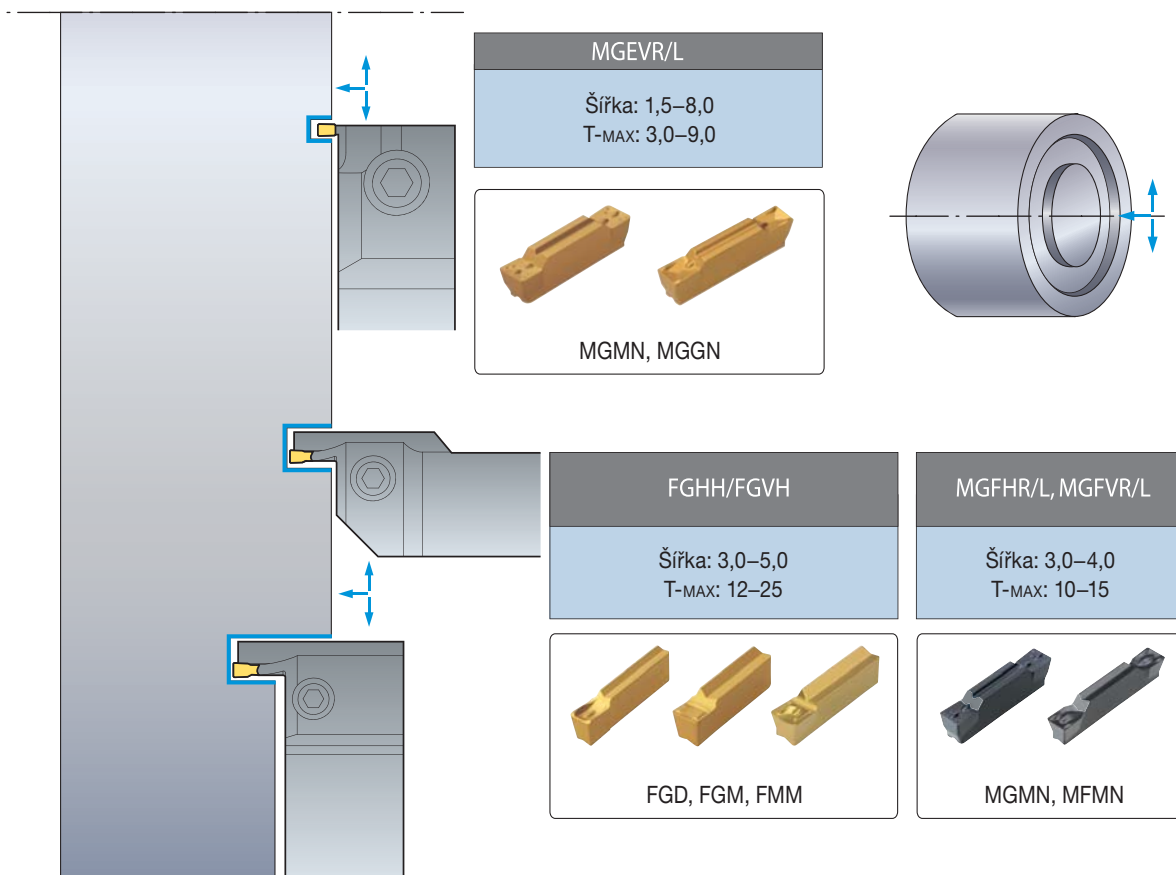

● Pro upichování

